

MODEL E-1

A creep action thermostat with the same low profile of the Model E but with less current sensitivity. Available with higher operating temperatures than the Model E.




FEATURES


- Conductive bimetal construction; the bimetallic element carries the circuit current.
- Creep action device; slow make/slow break switching action.
- No built-in differential between the opening and closing temperature.
- Case electrically alive.
- Preset calibration temperature; not adjustable in the field.
- Low profile design and opposite end termination allows for flexibility of installation.

MODEL E-1

TOP VIEW

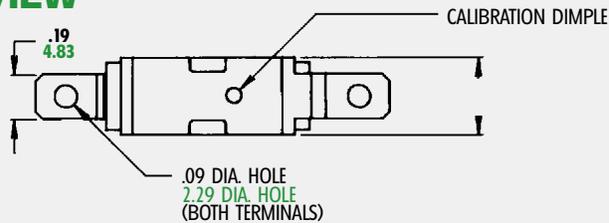

SIDE VIEW

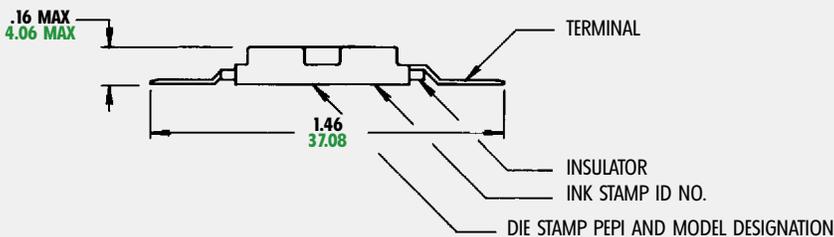


CONTACT RATINGS

- 5 amps/125 volts AC resistive

CALIBRATION TEMPERATURE RANGE

- Available with nominal calibration temperatures from 30°C to 180°C.

CURRENT DERATING CURVE

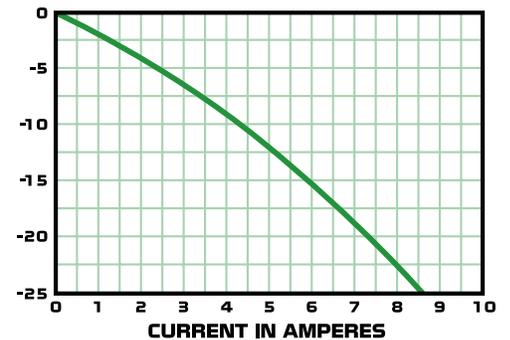

METRIC DIMENSIONS ARE IN MM (SHOWN IN GREEN)

Copyright 2006, Portage Electric Products, Incorporated, all right reserved

We come through when the heat is on™



Pepi®

Portage Electric Products, Inc.